



TERMINAL BLOCKS


TYPE SA 600V 20A

RATED SPECIFICATIONS

Type-Form	SA-  No. of poles when usable self-up screws word of "Y" be added
Rated voltage	600V
Rated current	20A
Usable wire	Max. 5.5mm ²
Terminal screws	⊕⊖ M4×8 For use clamp terminal ⊕⊖ M4×10 For use self-up screw
Main body	Phenole resin
Terminal metals	Brass (With nickel plating)
Clamps	Polyacetal
Cover	Chloride vinyl
Mark plate	White chloride vinyl
Temperature rise	Less than 20°C
Insulating resistance	Over 100MΩ by 500V D.C. Megger
With-standing voltage	2500V A.C. for one-min.

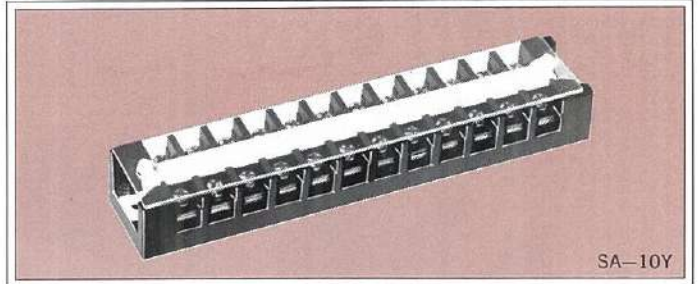


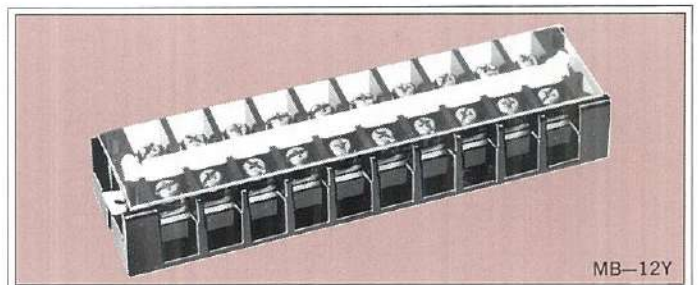
DIMENSIONS

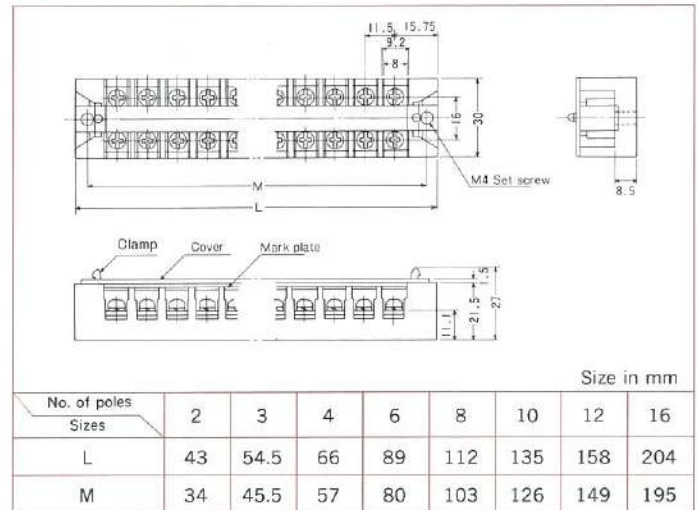


TYPE MB 600V 30A

RATED SPECIFICATIONS

Type-Form	MB-  No. of poles When usable self-up screws word of "Y" be added
Rated voltage	600V
Rated current	30A
Usable screws	Max. 8mm ²
Terminal screws	⊕⊖ M5×10 For use clamp terminal ⊕⊖ M5×12 For use self-up screw
Main body	Phenole resin
Terminal metals	Brass (With nickel plating)
Clamps	Polyacetal
Cover	Chloride vinyl
Mark plate	White chloride vinyl
Temperature rise	Less than 20°C
Insulating resistance	Over 100MΩ by 500V D.C. Megger
With-standing voltage	2500V A.C. for one-min.



DIMENSIONS

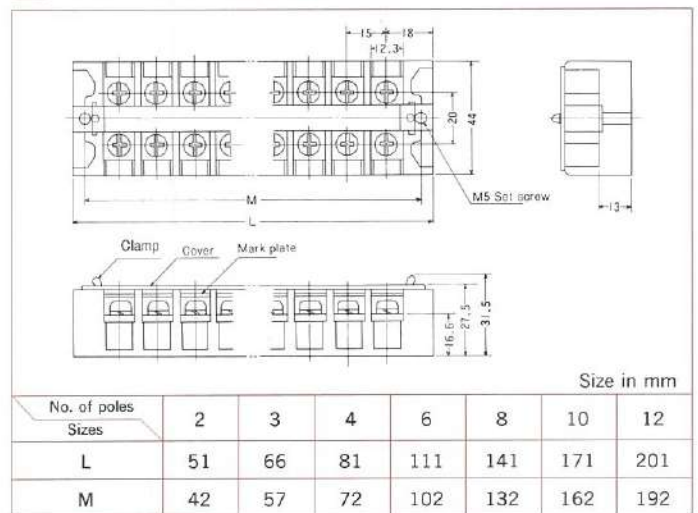

SEIKO ELECTRIC CO., LTD.

7-25 Toko 2-chome,
Hakata-ku, Fukuoka, 812 Japan
Phone: Fukuoka 092 (473) 8831